


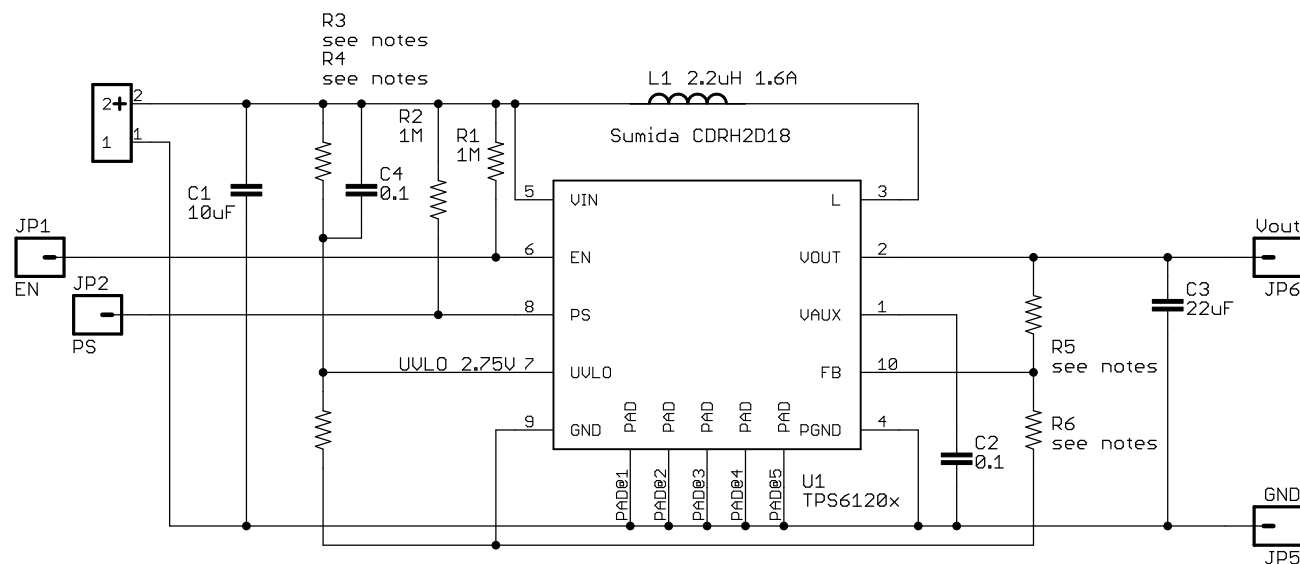

Notes:

GND, PGND connected w/non-current bearing trace

R3, R4 1% film

UVLO 0.8V (Single NiMH) R3 549K, R4 249K
UVLO 1.6V (Dual NiMH) R3 1330K, R4 249K
UVLO 2.4V (Triple NiMH) R3 2150K, R4 249K
UVLO 2.5V (LiPo) R3 2100K, R4 232K

same values can be used for 5V feedback divider

UVLO 2.75V (LiPo) R3 953K, R4 95.3K

R5, R6 1% film

3.3Vout TPS61201 R5 - 0ohm, R6 not populated
5Vout TPS61202 R5 - 0ohm, R6 not populated

for Vin < 2.5V increase C2 to 1uF

Circuits At Home

TITLE: LiPo33

Document Number:

REV:
1.2

Date: 9/13/2010 11:46:20 AM

Sheet: 1/1